



P185 THERMO


Thermo Pellet stove with painted steel cladding, top surface in Majolica. Steel structure and boiler, steel and Aluiker firebox, flue gas deflector, steel brazier and conveyor. Standard expansion tank, high-efficiency circulator, cast iron door, handle in painted steel.

COLOURS



GENERAL TECHNICAL CHARACTERISTICS

TECHNICAL DRAWING

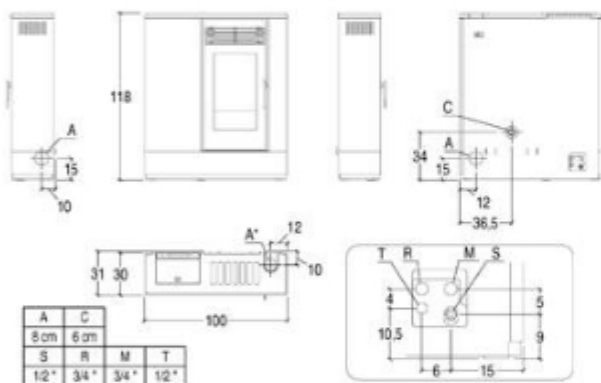

TECHNICAL DATA

Rated heat output (min-max)	kW	5,7 - 17,5
Heat output to the water (min-max)	kW	4,0 - 13,8
Power adjustable (positions)		16 automatic power levels based on set water temperature
Nominal thermal efficiency (min-max)	%	93 - 92,5
Consumption at rated heat output (min-max)	Kg/h	1,2 - 3,9
Dimensions WxDxH	cm	100 x 30 x 118
Cladding/front		
Top		majolica
Stove		steel
Baffle plate		steel
Firebox		steel - Aluiker®
Brazier		steel
Flue outlet Ø	cm	8
Boiler		steel
Circulation pump and safeties		standard
Expansion tank		standard
Sanitary hot water kit		-
Ash drawer		-
Door		cast iron
Ceramic glass		resistant up to 750°C
Door handle		painted steel, detachable
Hopper capacity		18
Stove control panel		Display with digital controls
Timer-thermostat with programming		6 daily time frames
Minimum power consumption	Watt	110
Maximum power consumption	Watt	390
Total weight	Kg	198

The availability of models may vary from Country to Country.