



P966 THERMO

Modern style stove with enamelled steel cladding offering a high heat output that is ideal for large spaces.



Terra d'Oriente



Nero Opaco



Bianco Meringa



Bordeaux



GENERAL TECHNICAL CHARACTERISTICS

Heating

Production of hot water for the heating system or to integrate to the existing water heating system

Multifunction display

Digital controls for ignition, shutdown, programming the timer thermostat and setting the water temperature

Programming

Daily with dual time settings

Structure

Stove body, brazier and boiler in steel, firebox in Aluker® and steel, door in cast iron. Closed expansion tank, water pump and standard safety devices

Cladding

Enamelled steel with majolica inserts


Air Glass System

Self-cleaning ceramic glass resistant up to 750°C

Easy Cleaning

Quick and easy maintenance, removable ash drawer

TECHNICAL DRAWING

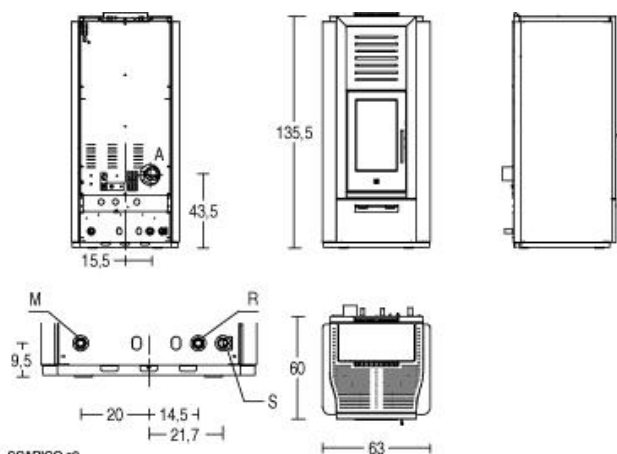

A = SCARICO Ø8
S = SCARICO TERMICO 3/4"
R = RET ORINO IMPIANTO 3/4"
M = MANDATA IMPIANTO 3/4"

TECHNICAL DATA

Rated heat output (min-max)	kW	9,0 - 28,5
Heat output to the water (min-max)	kW	7,0 - 23,5
Power adjustable (positions)		5
Nominal thermal efficiency (min-max)	%	90,0 - 92,0
Consumption at rated heat output (min-max)	Kg/h	1,9 - 6,0
Dimensions WxDxH	cm	63 x 60 x 135,5
Cladding/front		maiolica/acciaio verniciato
Firebox		acciaio
Baffle plate		acciaio
Firebox		Aluker
Brazier		acciaio
Flue outlet Ø	cm	8
Boiler		acciaio
Circulation pump and safeties		di serie
Expansion tank		chiuso
Sanitary hot water kit		
Ash drawer		estraibile
Door		ghisa
Ceramic glass		resistente a 750°C autopulente
Door handle		acciaio con finitura nichelata
Hopper capacity		52
Stove control panel		a comandi digitali
Timer -thermostat with programming		giornaliera con due fasce orarie
Minimum power consumption	Watt	130
Maximum power consumption	Watt	430
Total weight	Kg	265

The availability of models may vary from Country to Country.